



Chapter 2:

Introduction

to

C++

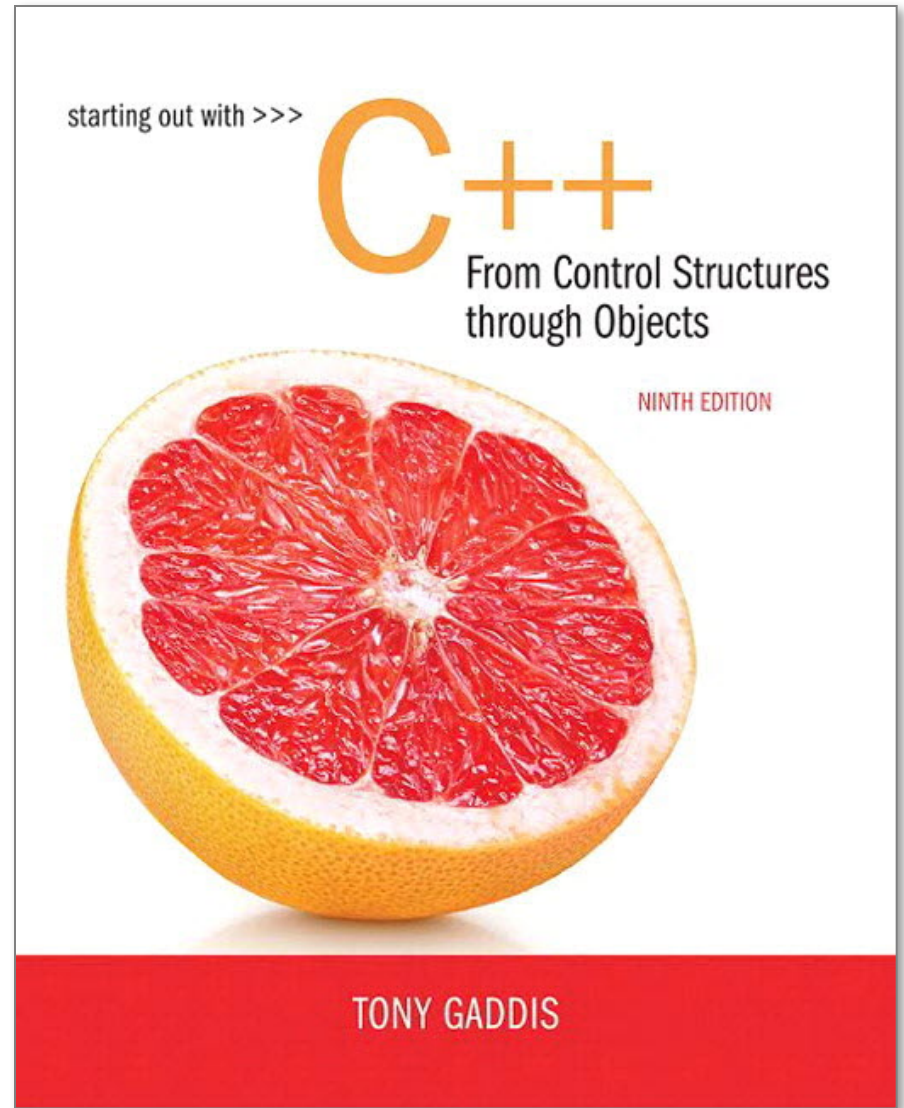

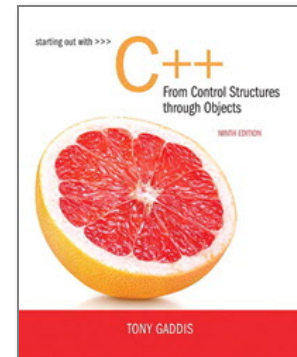

2.1

The Parts of a C++ Program



The Parts of a C++ Program


```
// sample C++ program ← comment
#include <iostream> ← preprocessor directive
using namespace std; ← which namespace to use
int main() ← beginning of function named main
{ ← beginning of block for main
    cout << "Hello, there!"; ← output statement
    return 0; ← Send 0 to operating system
} ← end of block for main
```



Special Characters

Character	Name	Meaning
//	Double slash	Beginning of a comment
#	Pound sign	Beginning of preprocessor directive
< >	Open/close brackets	Enclose filename in #include
()	Open/close parentheses	Used when naming a function
{ }	Open/close brace	Encloses a group of statements
" "	Open/close quotation marks	Encloses string of characters
;	Semicolon	End of a programming statement



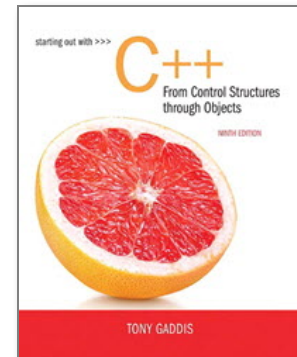

2.2

The `cout` Object



The `cout` Object

- Displays output on the computer screen
- You use the stream insertion operator `<<` to send output to `cout`:

```
cout << "Programming is fun!";
```

The `cout` Object

- Can be used to send more than one item to `cout`:

```
cout << "Hello " << "there!";
```

Or:

```
cout << "Hello ";  
cout << "there!";
```

The cout Object

🍊 This produces one line of output:

```
cout << "Programming is ";  
cout << "fun!";
```


The `endl` Manipulator

- You can use the `endl` manipulator to start a new line of output. This will produce two lines of output:

```
cout << "Programming is" << endl;  
cout << "fun!";
```

The endl Manipulator

```
cout << "Programming is" << endl;  
cout << "fun!";
```



The `endl` Manipulator

- You do NOT put quotation marks around `endl`
- The last character in `endl` is a lowercase L, not the number 1.

`endl` ← This is a lowercase L

The `\n` Escape Sequence

- You can also use the `\n` escape sequence to start a new line of output. This will produce two lines of output:


```
cout << "Programming is\n";  
cout << "fun!";
```

Notice that the `\n` is **INSIDE**
the string.

The `\n` Escape Sequence

```
cout << "Programming is\n";  
cout << "fun!";
```



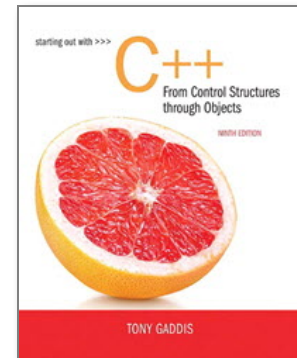

2.3


The `#include` Directive



The `#include` Directive

- Inserts the contents of another file into the program
- This is a preprocessor directive, not part of C++ language
- `#include` lines not seen by compiler
- Do not place a semicolon at end of `#include` line



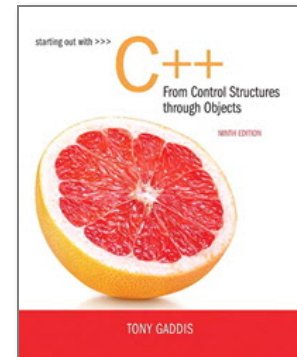

2.4

Variables and Literals



Variables and Literals

- Variable: a storage location in memory
 - Has a name and a type of data it can hold
 - Must be defined before it can be used:

```
int item;
```

Variable Definition in Program 2-7

Program 2-7

```
1  // This program has a variable.
2  #include <iostream>
3  using namespace std;
4
5  int main()
6  {
7      int number;
8
9      number = 5;
10     cout << "The value in number is " << number << endl;
11     return 0;
12 }
```

Variable Definition

Program Output

The value in number is 5



Literals

● Literal: a value that is written into a program's code.

`"hello, there"` (string literal)

`12` (integer literal)

Integer Literal in Program 2-9

Program 2-9

```
1 // This program has literals and a variable.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7     int apples;
8
9     apples = 20;
10    cout << "Today we sold " << apples << " bushels of apples.\n";
11    return 0;
12 }
```

20 is an integer literal

Program Output

Today we sold 20 bushels of apples.




String Literals in Program 2-9

Program 2-9

```
1 // This program has literals and a variable.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7     int apples;
8
9     apples = 20;
10    cout << "Today we sold " << apples << " bushels of apples.\n";
11    return 0;
12 }
```


These are string literals

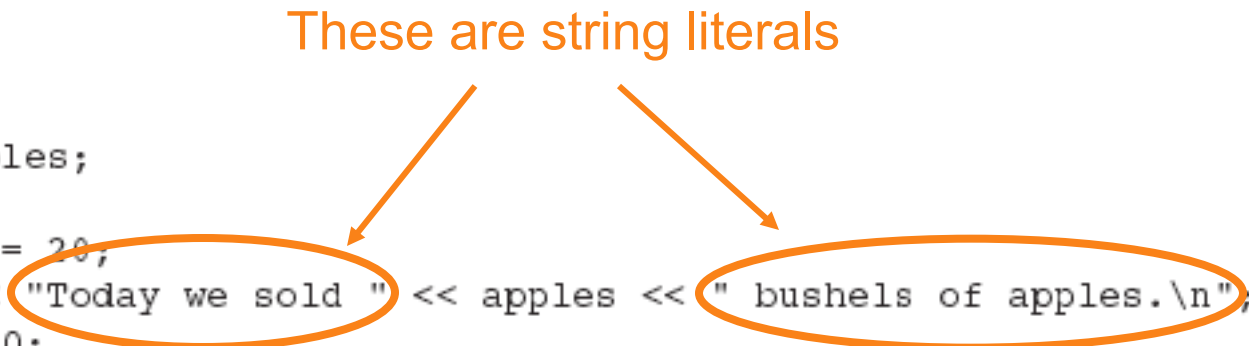

Program Output

Today we sold 20 bushels of apples.



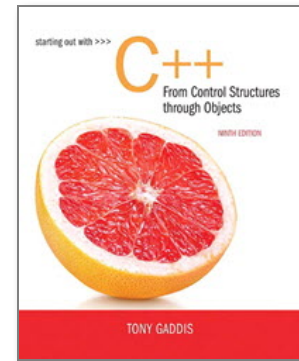

2.5

Identifiers

Identifiers

- An identifier is a programmer-defined name for some part of a program: variables, functions, etc.

C++ Key Words

Table 2-4 The C++ Key Words

<code>alignas</code>	<code>const</code>	<code>for</code>	<code>private</code>	<code>throw</code>
<code>alignof</code>	<code>constexpr</code>	<code>friend</code>	<code>protected</code>	<code>true</code>
<code>and</code>	<code>const_cast</code>	<code>goto</code>	<code>public</code>	<code>try</code>
<code>and_eq</code>	<code>continue</code>	<code>if</code>	<code>register</code>	<code>typedef</code>
<code>asm</code>	<code>decltype</code>	<code>inline</code>	<code>reinterpret_cast</code>	<code>typeid</code>
<code>auto</code>	<code>default</code>	<code>int</code>	<code>return</code>	<code>typename</code>
<code>bitand</code>	<code>delete</code>	<code>long</code>	<code>short</code>	<code>union</code>
<code>bitor</code>	<code>do</code>	<code>mutable</code>	<code>signed</code>	<code>unsigned</code>
<code>bool</code>	<code>double</code>	<code>namespace</code>	<code>sizeof</code>	<code>using</code>
<code>break</code>	<code>dynamic_cast</code>	<code>new</code>	<code>static</code>	<code>virtual</code>
<code>case</code>	<code>else</code>	<code>noexcept</code>	<code>static_assert</code>	<code>void</code>
<code>catch</code>	<code>enum</code>	<code>not</code>	<code>static_cast</code>	<code>volatile</code>
<code>char</code>	<code>explicit</code>	<code>not_eq</code>	<code>struct</code>	<code>wchar_t</code>
<code>char16_t</code>	<code>export</code>	<code>nullptr</code>	<code>switch</code>	<code>while</code>
<code>char32_t</code>	<code>extern</code>	<code>operator</code>	<code>template</code>	<code>xor</code>
<code>class</code>	<code>false</code>	<code>or</code>	<code>this</code>	<code>xor_eq</code>
<code>compl</code>	<code>float</code>	<code>or_eq</code>	<code>thread_local</code>	

You cannot use any of the C++ key words as an identifier. These words have reserved meaning.



Variable Names

- A variable name should represent the purpose of the variable. For example:

`itemsOrdered`

The purpose of this variable is to hold the number of items ordered.




Identifier Rules

- The first character of an identifier must be an alphabetic character or an underscore (_),
- After the first character you may use alphabetic characters, numbers, or underscore characters.
- Upper- and lowercase characters are distinct

Valid and Invalid Identifiers

IDENTIFIER	VALID?	REASON IF INVALID
<code>totalSales</code>	Yes	
<code>total_Sales</code>	Yes	
<code>total.Sales</code>	No	Cannot contain .
<code>4thQtrSales</code>	No	Cannot begin with digit
<code>totalSale\$</code>	No	Cannot contain \$



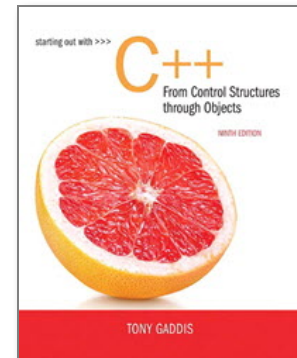

2.6

Integer Data Types



Integer Data Types

- Integer variables can hold whole numbers such as 12, 7, and -99.

Table 2-6 Integer Data Types

Data Type	Typical Size	Typical Range
<code>short int</code>	2 bytes	−32,768 to +32,767
<code>unsigned short int</code>	2 bytes	0 to +65,535
<code>int</code>	4 bytes	−2,147,483,648 to +2,147,483,647
<code>unsigned int</code>	4 bytes	0 to 4,294,967,295
<code>long int</code>	4 bytes	−2,147,483,648 to +2,147,483,647
<code>unsigned long int</code>	4 bytes	0 to 4,294,967,295
<code>long long int</code>	8 bytes	−9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
<code>unsigned long long int</code>	8 bytes	0 to 18,446,744,073,709,551,615



Defining Variables

- Variables of the same type can be defined

- On separate lines:

- ```
int length;
```

- ```
int width;
```

- ```
unsigned int area;
```

- On the same line:

- ```
int length, width;
```

- ```
unsigned int area;
```

- Variables of different types must be in different definitions



# Integer Types in Program 2-10

```
1 // This program has variables of several of the integer types.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7 int checking;
8 unsigned int miles;
9 long diameter;
10
11 checking = -20;
12 miles = 4276;
13 diameter = 100000;
14 cout << "We have made a long journey of " << miles;
15 cout << " miles.\n";
16 cout << "Our checking account balance is " << checking;
17 cout << "\nThe galaxy is about " << diameter;
18 cout << " light years in diameter.\n";
19 return 0;
20 }
```

This program has three variables:  
checking, miles, and diameter



# Integer Literals

- An integer literal is an integer value that is typed into a program's code. For example:

```
itemsOrdered = 15;
```


In this code, 15 is an integer literal.



# Integer Literals in Program 2-10


```
1 // This program has variables of several of the integer types.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7 int checking;
8 unsigned int miles;
9 long diameter;
10
11 checking = -20;
12 miles = 4276;
13 diameter = 100000;
14 cout << "We have made a long journey of " << miles;
15 cout << " miles.\n";
16 cout << "Our checking account balance is " << checking;
17 cout << "\nThe galaxy is about " << diameter;
18 cout << " light years in diameter.\n";
19 return 0;
20 }
```

Integer Literals

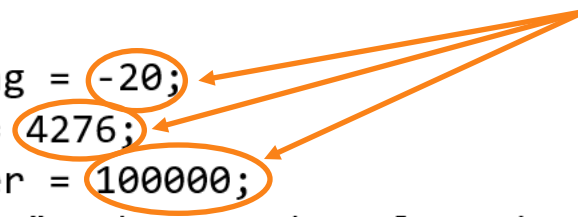

# Integer Literals

- Integer literals are stored in memory as `ints` by default
- To store an integer constant in a long memory location, put 'L' at the end of the number: `1234L`
- To store an integer constant in a long long memory location, put 'LL' at the end of the number: `324LL`
- Constants that begin with '0' (zero) are base 8: `075`
- Constants that begin with '0x' are base 16: `0x75A`

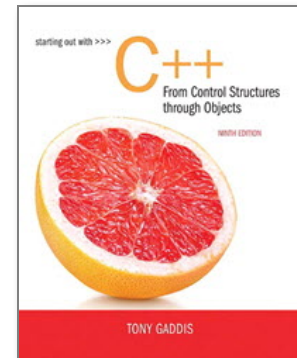

# 2.7

## The `char` Data Type



# The `char` Data Type

- Used to hold characters or very small integer values
- Usually 1 byte of memory
- Numeric value of character from the character set is stored in memory:

CODE:  
`char letter;`  
`letter = 'C';`

MEMORY:  
letter

67

# Character Literals

- Character literals must be enclosed in single quote marks. Example:

'A'

# Character Literals in Program 2-14

## Program 2-14

```
1 // This program uses character literals.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7 char letter;
8
9 letter = 'A';
10 cout << letter << '\n';
11 letter = 'B';
12 cout << letter << '\n';
13 return 0;
14 }
```

## Program Output

A  
B



# Character Strings


- A series of characters in consecutive memory locations:

`"Hello"`

- Stored with the null terminator, `\0`, at the end:

- Comprised of the characters between the " "

|   |   |   |   |   |    |
|---|---|---|---|---|----|
| H | e | l | l | o | \0 |
|---|---|---|---|---|----|

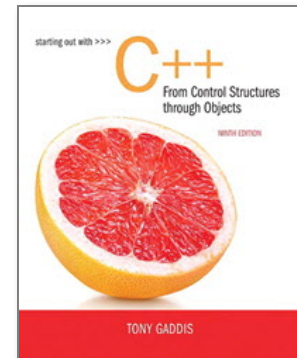

# 2.8

## The C++ `string` Class





# The C++ `string` Class

- Special data type supports working with strings

```
#include <string>
```

- Can define `string` variables in programs:

```
string firstName, lastName;
```

- Can receive values with assignment operator:

```
firstName = "George";
```

```
lastName = "Washington";
```

- Can be displayed via `cout`

```
cout << firstName << " " << lastName;
```



# The `string` class in Program 2-15


## Program 2-15

```
1 // This program demonstrates the string class.
2 #include <iostream>
3 #include <string> // Required for the string class.
4 using namespace std;
5
6 int main()
7 {
8 string movieTitle;
9
10 movieTitle = "Wheels of Fury";
11 cout << "My favorite movie is " << movieTitle << endl;
12 return 0;
13 }
```

## Program Output

My favorite movie is Wheels of Fury



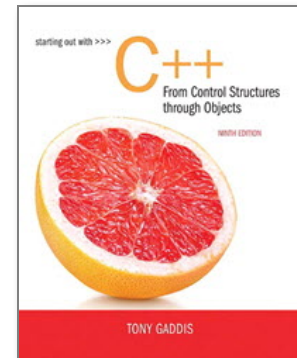

# 2.9

## Floating-Point Data Types



# Floating-Point Data Types

- The floating-point data types are:  
`float`  
`double`  
`long double`
- They can hold real numbers such as:  
12.45                      -3.8
- Stored in a form similar to scientific notation
- All floating-point numbers are signed

# Floating-Point Data Types

**Table 2-8 Floating Point Data Types on PCs**

| Data Type             | Key Word                  | Description                                                             |
|-----------------------|---------------------------|-------------------------------------------------------------------------|
| Single precision      | <code>float</code>        | 4 bytes. Numbers between $\pm 3.4\text{E-}38$ and $\pm 3.4\text{E}38$   |
| Double precision      | <code>double</code>       | 8 bytes. Numbers between $\pm 1.7\text{E-}308$ and $\pm 1.7\text{E}308$ |
| Long double precision | <code>long double*</code> | 8 bytes. Numbers between $\pm 1.7\text{E-}308$ and $\pm 1.7\text{E}308$ |



# Floating-Point Literals

- Can be represented in

- Fixed point (decimal) notation:

`31.4159`

`0.0000625`

- E notation:

`3.14159E1`

`6.25e-5`

- Are `double` by default

- Can be forced to be float (`3.14159f`) or long double (`0.0000625L`)



# Floating-Point Data Types in Program 2-16


## Program 2-16

```
1 // This program uses floating point data types.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7 float distance;
8 double mass;
9
10 distance = 1.495979E11;
11 mass = 1.989E30;
12 cout << "The Sun is " << distance << " meters away.\n";
13 cout << "The Sun\'s mass is " << mass << " kilograms.\n";
14 return 0;
15 }
```

## Program Output

The Sun is 1.49598e+011 meters away.  
The Sun's mass is 1.989e+030 kilograms.



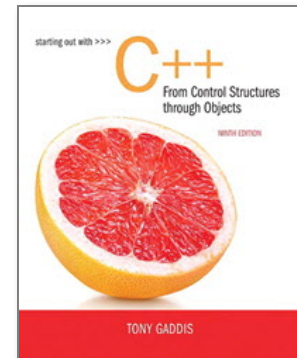

# 2.10

## The `bool` Data Type





# The `bool` Data Type

- Represents values that are `true` or `false`
- `bool` variables are stored as small integers
- `false` is represented by 0, `true` by 1:

```
bool allDone = true; allDone finished
bool finished = false;

1

0

```



# Boolean Variables in Program 2-17


## Program 2-17

```
1 // This program demonstrates boolean variables.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7 bool boolValue;
8
9 boolValue = true;
10 cout << boolValue << endl;
11 boolValue = false;
12 cout << boolValue << endl;
13 return 0;
14 }
```

## Program Output

1  
0



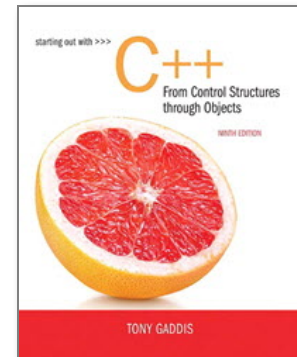

# 2.11


## Determining the Size of a Data Type



# Determining the Size of a Data Type

- The `sizeof` operator gives the size of any data type or variable:

```
double amount;
cout << "A double is stored in "
 << sizeof(double) << "bytes\n";
cout << "Variable amount is stored in "
 << sizeof(amount)
 << "bytes\n";
```

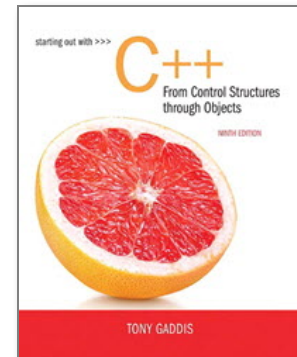

# 2.12

## Variable Assignments and Initialization



# Variable Assignments and Initialization

- An assignment statement uses the = operator to store a value in a variable.

```
item = 12;
```

- This statement assigns the value 12 to the `item` variable.

# Assignment

- The variable receiving the value must appear on the left side of the = operator.
- This will NOT work:

```
// ERROR!
12 = item;
```

# Variable Initialization

- To initialize a variable means to assign it a value when it is defined:

```
int length = 12;
```

- Can initialize some or all variables:

```
int length = 12, width = 5, area;
```





# Variable Initialization in Program 2-19

## Program 2-19

```
1 // This program shows variable initialization.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7 int month = 2, days = 28;
8
9 cout << "Month " << month << " has " << days << " days.\n";
10 return 0;
11 }
```

## Program Output

Month 2 has 28 days.



# Declaring Variables With the `auto` Key Word

- C++ 11 introduces an alternative way to define variables, using the `auto` key word and an initialization value. Here is an example:

```
auto amount = 100; ← int
```


- The `auto` key word tells the compiler to determine the variable's data type from the initialization value.

```
auto interestRate = 12.0; ← double
```

```
auto stockCode = 'D'; ← char
```

```
auto customerNum = 459L; ← long
```



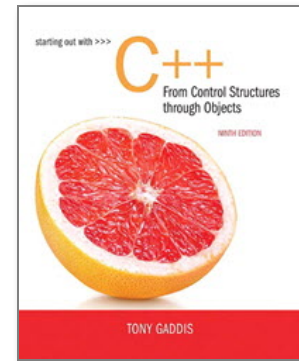

# 2.13

## Scope

# Scope


- The scope of a variable: the part of the program in which the variable can be accessed
- A variable cannot be used before it is defined

# Variable Out of Scope in Program 2-20

## Program 2-20

```
1 // This program can't find its variable.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7 cout << value; // ERROR! value not defined yet!
8
9 int value = 100;
10 return 0;
11 }
```



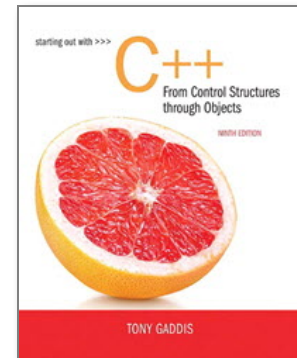

# 2.14

## Arithmetic Operators



# Arithmetic Operators

- Used for performing numeric calculations
- C++ has unary, binary, and ternary operators:
  - unary (1 operand)       $-5$
  - binary (2 operands)       $13 - 7$
  - ternary (3 operands)       $\text{exp1} ? \text{exp2} : \text{exp3}$

# Binary Arithmetic Operators

| SYMBOL | OPERATION      | EXAMPLE                   | VALUE OF<br>ans |
|--------|----------------|---------------------------|-----------------|
| +      | addition       | <code>ans = 7 + 3;</code> | 10              |
| -      | subtraction    | <code>ans = 7 - 3;</code> | 4               |
| *      | multiplication | <code>ans = 7 * 3;</code> | 21              |
| /      | division       | <code>ans = 7 / 3;</code> | 2               |
| %      | modulus        | <code>ans = 7 % 3;</code> | 1               |





# Arithmetic Operators in Program 2-21

## Program 2-21

```
1 // This program calculates hourly wages, including overtime.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7 double regularWages, // To hold regular wages
8 basePayRate = 18.25, // Base pay rate
9 regularHours = 40.0, // Hours worked less overtime
10 overtimeWages, // To hold overtime wages
11 overtimePayRate = 27.78, // overtime pay rate
12 overtimeHours = 10, // overtime hours worked
13 totalWages; // To hold total wages
14
15 // Calculate the regular wages.
16 regularWages = basePayRate * regularHours;
17
18 // Calculate the overtime wages.
19 overtimeWages = overtimePayRate * overtimeHours;
20
21 // Calculate the total wages.
22 totalWages = regularWages + overtimeWages;
23
24 // Display the total wages.
25 cout << "Wages for this week are $" << totalWages << endl;
26 return 0;
27 }
```

## Program Output

Wages for this week are \$1007.8



# A Closer Look at the / Operator

- / (division) operator performs integer division if both operands are integers

```
cout << 13 / 5; // displays 2
```

```
cout << 91 / 7; // displays 13
```

- If either operand is floating point, the result is floating point

```
cout << 13 / 5.0; // displays 2.6
```

```
cout << 91.0 / 7; // displays 13.0
```


# A Closer Look at the % Operator

- 🍊 % (modulus) operator computes the remainder resulting from integer division

```
cout << 13 % 5; // displays 3
```

- 🍊 % requires integers for both operands

```
cout << 13 % 5.0; // error
```

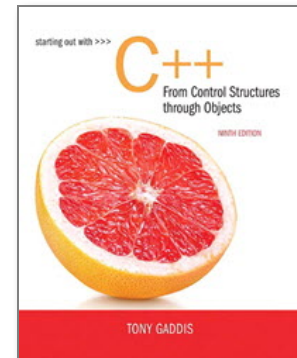

# 2.15

## Comments



# Comments

- Used to document parts of the program
- Intended for persons reading the source code of the program:
  - Indicate the purpose of the program
  - Describe the use of variables
  - Explain complex sections of code
- Are ignored by the compiler

# Single-Line Comments

● Begin with `//` through to the end of line:

```
int length = 12; // length in
inches
```

```
int width = 15; // width in inches
```

```
int area; // calculated area
```

```
// calculate rectangle area
```

```
area = length * width;
```

# Multi-Line Comments


- Begin with `/*`, end with `*/`

- Can span multiple lines:

```
/* this is a multi-line
 comment
*/
```

- Can begin and end on the same line:

```
int area; /* calculated area */
```

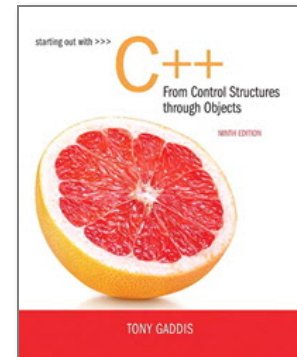

# 2.16

## Named Constants





# Named Constants

- Named constant (constant variable): variable whose content cannot be changed during program execution
- Used for representing constant values with descriptive names:

```
const double TAX_RATE = 0.0675;
const int NUM_STATES = 50;
```

- Often named in uppercase letters

# Named Constants in Program 2-28


## Program 2-28

```
1 // This program calculates the circumference of a circle.
2 #include <iostream>
3 using namespace std;
4
5 int main()
6 {
7 // Constants
8 const double PI = 3.14159;
9 const double DIAMETER = 10.0;
10
11 // Variable to hold the circumference
12 double circumference;
13
14 // Calculate the circumference.
15 circumference = PI * DIAMETER;
16
17 // Display the circumference.
18 cout << "The circumference is: " << circumference << endl;
19 return 0;
20 }
```

## Program Output

The circumference is: 31.4159



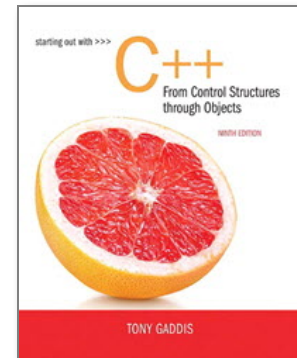

# 2.17

## Programming Style



# Programming Style

- The visual organization of the source code
- Includes the use of spaces, tabs, and blank lines
- Does not affect the syntax of the program
- Affects the readability of the source code

